


90° Eyelet

For attachment to a variety of substrates using suitable fixings.


- Ideal for use with Gripple concrete screws for direct soffit mounting
- Available up to 90kg SWL, with a 5:1 safety factor
- Comes as a ready-to-use kit with wire rope and Gripple fastener
- Available in lengths from 1 m to 10 m
- Fire rated version available



Installation

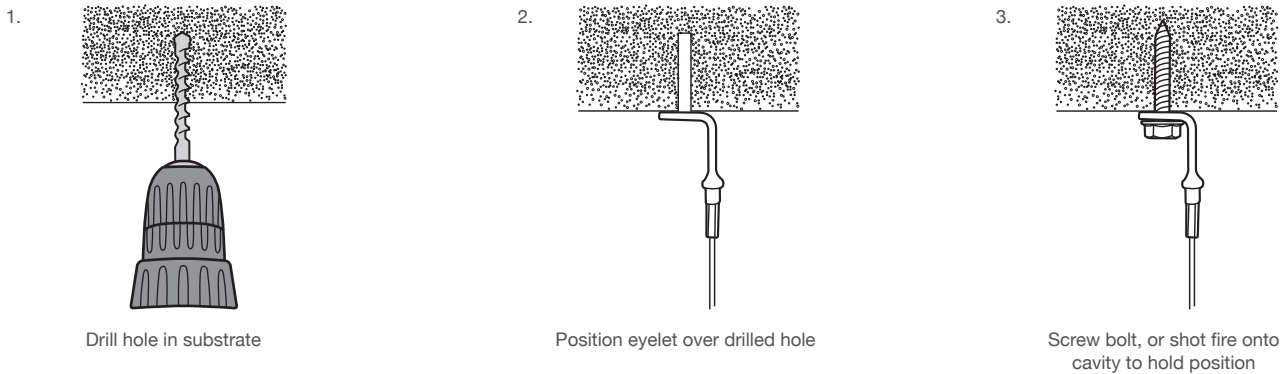

Specifications

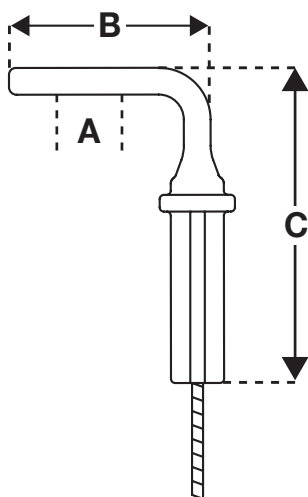

Size	A (mm)	B (mm)	C (mm)
No.1	7.5	25	38
No.2	7.5	25	38
No.3	7.5	25	38

Submittal Information

Safe Working Load:
Refer to hanger load ratings and safe working loads.

Material:
Steel Finish: Bright zinc plated

Approvals: Lloyds certified and third party fire tested

Standard Hanger Options



For more options on available hangers please contact us or visit gripple.net.au

Important Recommendations

1. Construction materials and conditions vary on different sites. If it is suspected that the base material has insufficient strength to achieve a suitable fixing, contact Gripple Ltd. The responsibility for judgement of base material strength lies with the installer, and not with Gripple Australia.
2. Not to be used in marine, coastal or corrosive environments.
3. The information and recommendations given herein are believed to be correct at time of writing. The data has been obtained from tests done under laboratory, or other controlled conditions and it is the user's responsibility to use the data given in light of conditions on site, taking account of the intended use of the products concerned.
4. Whilst Gripple Australia can give general guidance and advice, the nature of Gripple products means that the ultimate responsibility for selecting the correct product for a particular application must lie with the customer.
5. All products must be used, handled and applied in accordance with current product instructions and manufacturers recommendations for use, published by Gripple Australia.