


Duct Trapeze

Ideal for fast suspension of rectangular ducting and associated equipment


- Reduces time spent working at height
- Eliminates channel support
- Duct Trapeze can be installed at ground level
- Suitable for ducting made from 0.6 – 1.5 mm gauge steel
- Three fixing points, for self-drilling screws or pop rivets (not provided)
- Rubber pad prevents air leakage and dampens vibration
- Conforms to DW144 class D
- Pin allows rapid adjustment
- Supplied as a ready-to-use kit with a wide range of end fixings



Installation & Adjustment

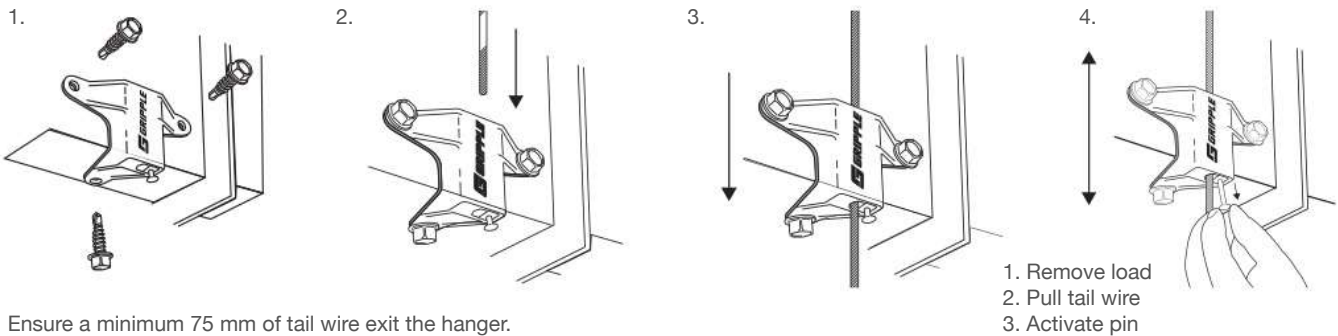

Specifications

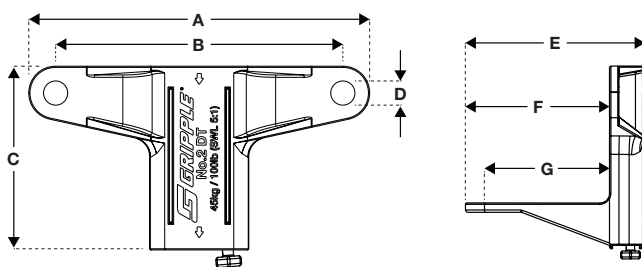

Dimensions	mm
A	70
B	59
C	38
D	Ø - 5.0
E	38.0
F	29
G	23

Submittal Information

Safe Working Load:
Duct Trapeze - 45 kg @ 5:1 safety factor

Material:
Housing - Type ZA2 Zinc
Wedge - Sintered steel hardened to min. 56 Rockwell C
Spring - Stainless Steel (Type 302)
End Cap - UV stabilised homopolymer propylene
Rubber Pad - EPDM 40±5 SHORE A
Pin - A2 Stainless Steel

Available End Fixings



For more options on available end fixings please contact us or visit gripple.net.au

