


# Fast Trak® - Standard

Pre-fabricated bracket solution offering speed, flexibility and efficient use of space, for the installation of electrical containment, pipework, ductwork and other mechanical services in restricted places.

- Quicker to install, up to six times faster than traditional suspension systems
- Safe pre-fabricated system which removes the need to cut threaded rod or channel on-site
- Tool free adjustment, bracket can be moved up and down the tracks to accommodate changes in position during installation
- Zero waste as tracks bend neatly under bracket\*
- Versatile four-sided bracket provides suspension point on every face; ideal for installation of combined bracketry and multi-tiered configuration to accommodate additional services
- Easy measurement indicators at each end of the bracket offer measurement guide when marking fixing points on the ceiling; M4 level markers on the tracks highlight 50 mm increments, no leveling tools required
- Neat & tidy system can be 'stacked' on-site to reduce storage requirements




## Installation & Adjustment

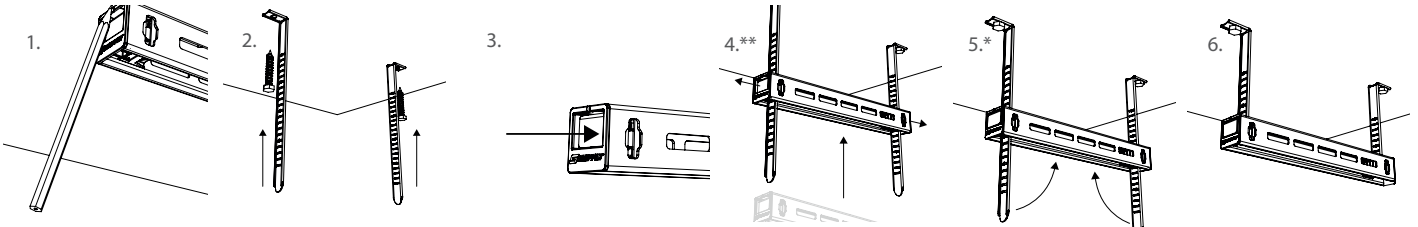

Internal applications only. Do not adjust under load. No dynamic loading. Single use only. \*\*When installed correctly, button must be fully retracted and flush with the cartridge edge. \*Excess tracks can also be snapped off once bracket is levelled & secured for a neater finish. Bending tracks by hand is not recommended when excess is under 100 mm.

## Specifications

### Bracket

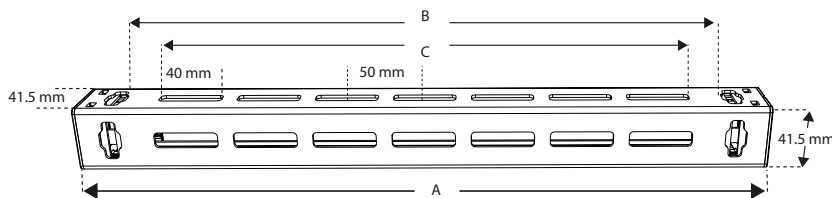


Bracket	FTB-170	FTB-270	FTB-370	FTB-470	FTB-570	FTB-670	FTB-770
A (mm) Length	239	339	439	539	639	739	839
B (mm) Suspension Space	176	276	376	476	576	676	776
C (mm) Working Space	140	240	340	440	540	640	740
No. of Slots	3	5	7	9	11	13	15

Bracket	FTB-870	FTB-970	FTB-1070	FTB-1170	FTB-1270	FTB-1370	FTB-1470
A (mm) Length	939	1039	1139	1239	1339	1439	1539
B (mm) Suspension Space	876	976	1076	1176	1276	1376	1476
C (mm) Working Space	840	940	1040	1140	1240	1340	1440
No. of Slots	17	19	21	23	25	27	29

### Track



Track	A (mm)	B (mm)
FTT-200	200	90
FTT-300	300	190
FTT-400	400	290
FTT-500	500	390
FTT-600	600	490
FTT-700	700	590
FTT-800	800	690
FTT-900	900	790
FTT-1000	1000	890
FTT-1100	1100	990
FTT-1200	1200	1090
FTT-1300	1300	1190
FTT-1400	1400	1290
FTT-1500	1500	1390

## Submittal Information

### Material:

#### Track & Bracket Material –

BS EN 10346:2009 DX51D (Mild Steel, Pre-Galv Z275)

#### Cartridge Housing – ABS Plastic

Spring – BS 2056 Austenitic 302S26 G2

Latch – EN 10346 S450GD

**Safe Working Load:** System rating: Up to 200 kg @ 3:11

### Approvals:

Lloyds certified


UL tested

TÜV tested



APAVE tested

# Fast Trak® - Standard

Maximum Working Load (kg/kN)\*

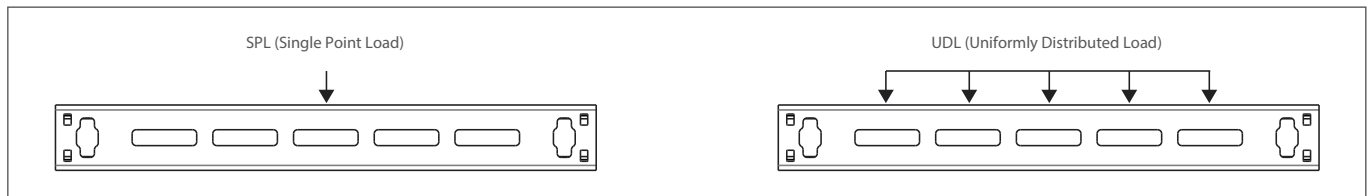

FTB-270 to FTB-1370

Bracket Orientation	'n' orientation		'c' orientation	
				
	Single Point Load (SPL) @ 3:1	100 kg	70 kg	0.68 kN
		0.98 kN		
	Uniformly Distributed Load (UDL) @ 3:1	200 kg	130 kg	1.27 kN
		1.96 kN		

FTB-1470

Single Point Load (SPL) @ 3:1	100 kg	0.98 kN	70 kg	0.68 kN
Uniformly Distributed Load (UDL) @ 3:1	175 kg	1.71 kN	130 kg	1.27 kN

\*For more details on specified loads or additional deflection ratings please contact Grippler Technical Services.