


Lockable Plus

Designed for suspension and bracing of high load applications and catenary installations.

- Quick and simple installation
- Integral lock secures wire in both channels simultaneously for safety and security
- Designed for high load applications
- Easily tensioned and retensioned
- Suitable for indoor and outdoor applications
- Supplied in ready-to-use kits




Installation & Adjustment

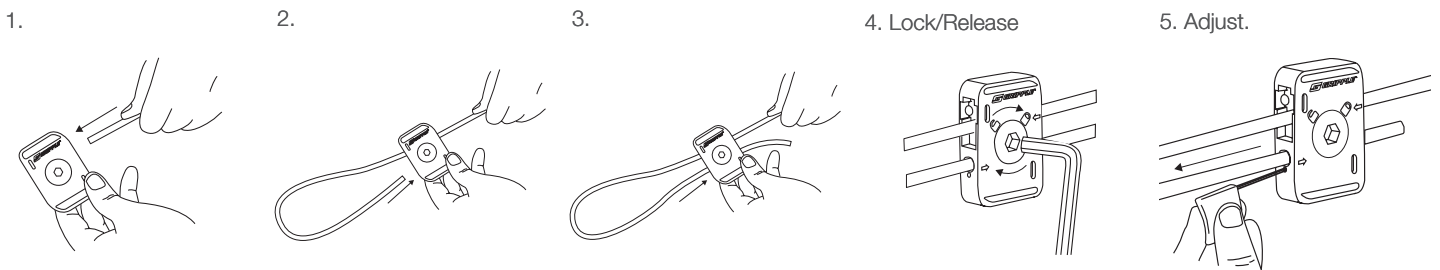

Ensure a minimum 75 mm of tail wire exit the hanger.

Specifications

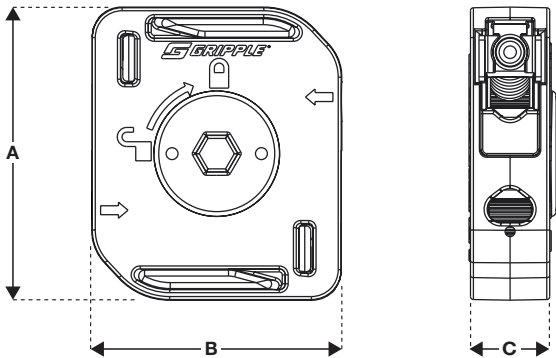

Dimensions	D2 (mm)	D3 (mm)	D4 (mm)	D5 (mm)	D6 (mm)	D8 (mm)
A	33	33	49	62	62	67
B	30.5	30.5	42	42	42	51
C	11.2	11.2	15	15	15	815
Max Vertical Load (kg)	45	90	225	225	325	-

Submittal Information

Safe Working Load:
Please refer to page two overleaf.

Material:

Housing - Type ZA2 Zinc

Wedge - Sintered steel hardened to min. 56 Rockwell C

Spring - Stainless Steel (Type 302)

End Cap - UV stabilised homopolymer propylene

Rubber Pad - EPDM 40±5 SHORE A

Pin - A2 Stainless Steel

Available End Fixings




For more options on available end fixings please contact us or visit gripple.net.au



Lockable Plus

Catenary

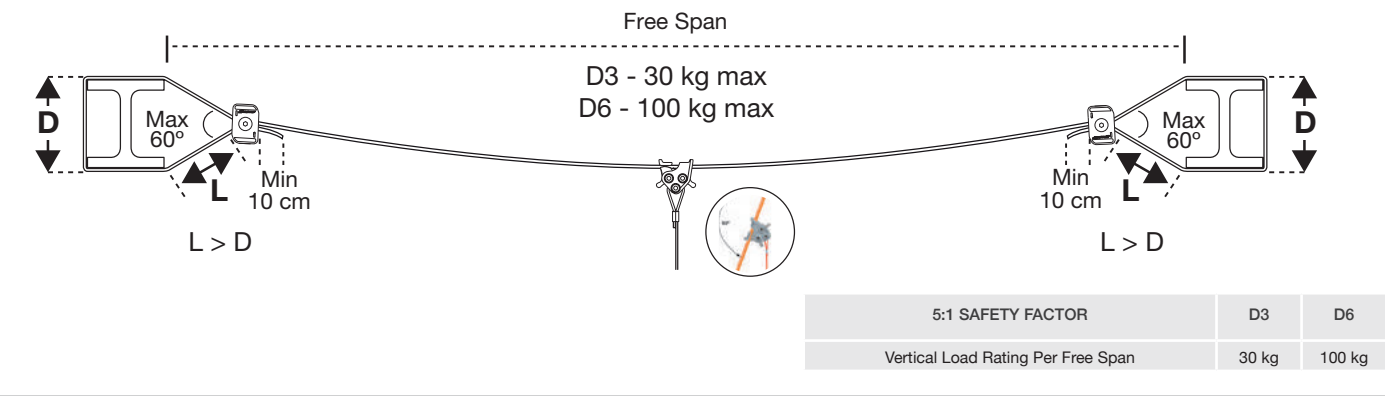

Hanger



Bracing

