

# Ring Anchor




The ring anchor is perfect for use in both cracked and non-cracked concrete with our No.1 or No.2 hanger kits. Limited load ratings apply.

- Ideal for fixing into concrete and cracked concrete
- Comes as a ready-to-use kit with wire rope and Gripple hanger
- Available in lengths from 1 m to 10 m (other lengths available upon request)


Non Gripple product.  
Supplied directly by Polyplas International.



## Installation Guidelines

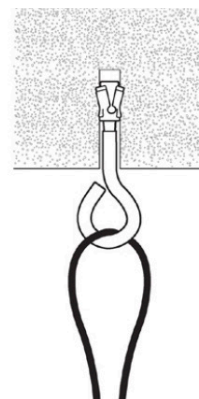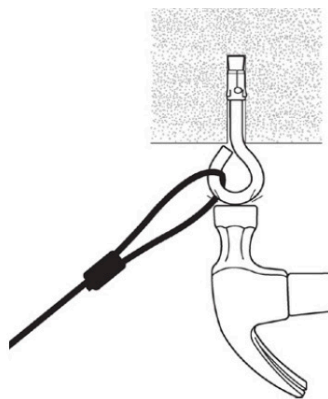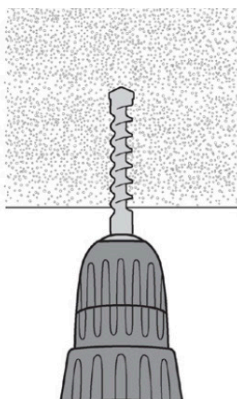

## Specifications & Dimensions

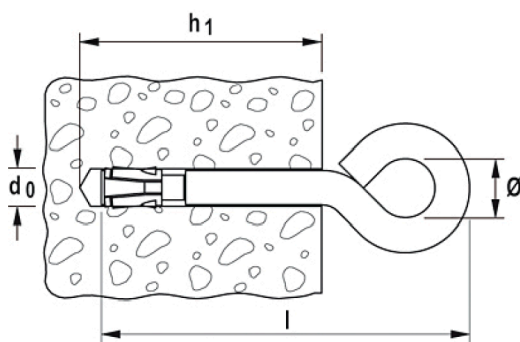

d0	Hole Diameter	6.0 mm
h1	Minimum Hole Depth	36.0 mm
Ø	Internal Diameter	10.0 mm
l	Anchor Length	54.0 mm

### Standard Hangers



Standard Hanger



Trapeze



Express

More hanger options available at [www.grippleaustralia.com.au](http://www.grippleaustralia.com.au)

### Anchor Max Load Ratings

Wire Size	Max. Load Single anchor suspension	Max. Load - Two anchors used as a cradle
No.1 (1.5mm)	15 kg	15 kg
No.2 (2.0mm)	45 kg	45 kg