


Trapeze Range

Ideal for single and multi-tiered suspension of piping, electrical and HVAC services


- Ideal for fast suspension of cable containment, pipework, ductwork, air conditioning cassettes and chilled beams
- Aesthetic, tapered design; accommodates all slots sizes
- Discreet; fits completely inside the channel
- Pre-fits onto channel using retainer to ease working at height
- Available as an accessory for multi-tiered installations
- Supplied as a ready-to-use kit with a wide range of end fixings
- Ideal for use with Gripple Pipe Bracket and QT Universal Clamp for mechanical installations



Installation & Adjustment

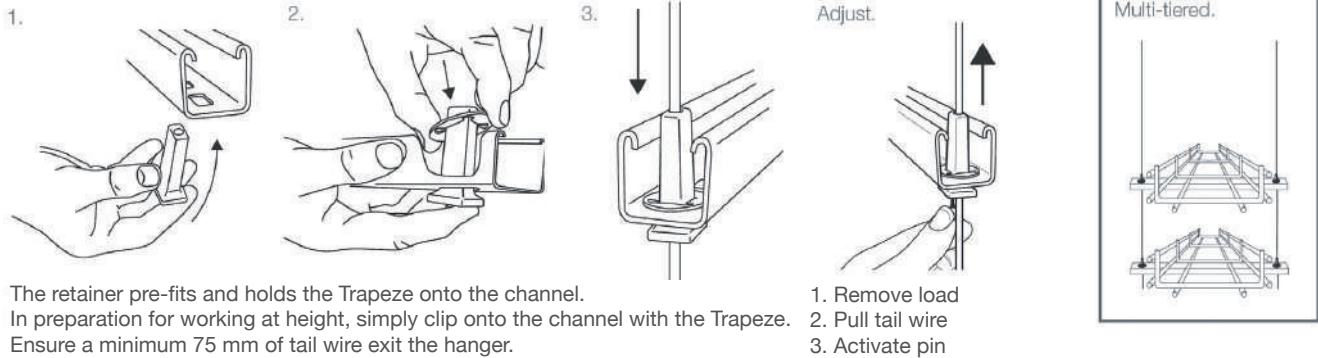

Specifications

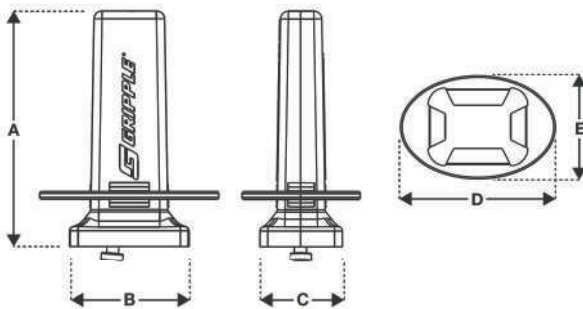

Dimensions	No. 2 (mm)	No. 3 (mm)
A	37.5	43
B	27.5	30
C	20.8	22
D	28	33
E	26	31

Product Information

Safe Working Load:

Trapeze No.2 - 45 kg @ 5:1 safety factor
Trapeze No.3 - 90 kg @ 5:1 safety factor

Material:

Housing - Type ZA2 Zinc

Wedge - Sintered steel hardened to min. 56 Rockwell C


Spring - Stainless Steel (Type 302)

End Cap - UV stabilised homopolymer propylene

Pin - A2 Stainless Steel

Retainer - Acetal copolymer

Available End Fixings

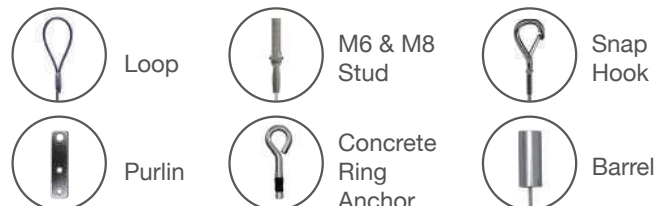

For more options on available end fixings please contact us or visit gripple.net.au

