


EXIT SIGN HANGER KITS

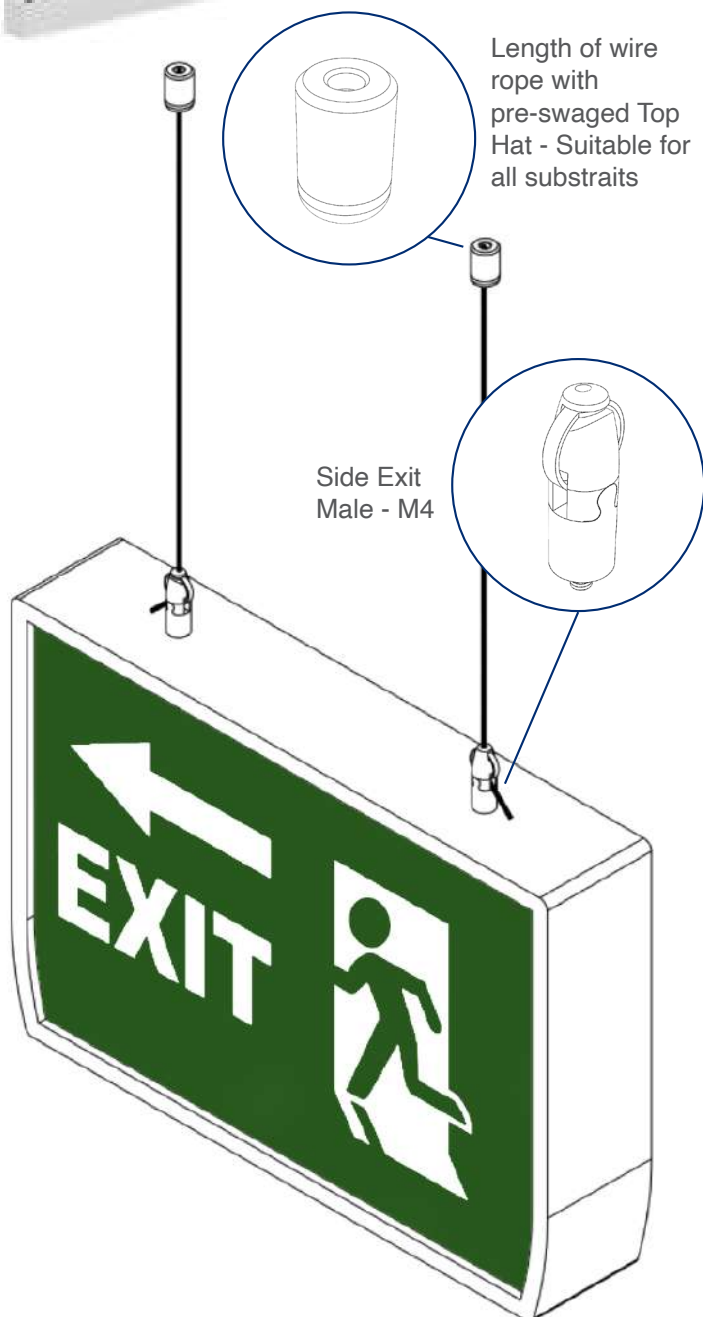

ANGEL - SIDE EXIT MALE

FEATURES / BENEFITS

- Simple on-handed operation for easy adjustment
- Contemporary design to complement the overall suspension
- Extensive range for use with most luminaries
- Suitable for loads up to 15kg with a 5:1 safety factor, to accommodate a range of suspension requirements
- Supplied in convenient, ready to-use kits in lengths up to 10 metres as standard
- Uses 1.5mm wire rope to make the suspension as discreet as possible
- As standard, all kits come complete with the aesthetic 'Top Hat Barrel' ceiling fixing with M6 thread. Other ceiling fixings including Loops, Studs, Magnetic Pads are available on request

ANCHOR SPECIFICATION

Concrete = 2 x M6 thru-bolt in the kit

Purlins = 8g Tek Screw

Timber = 8g Timber Screw

Ceiling Grid = Tbar- Clip M6 2 Pack

Gyp-Rock = Ceiling Anchor (Wall Mate)




ANGEL TOP AND BOTTOM



CONCRETE



CEILING GRID

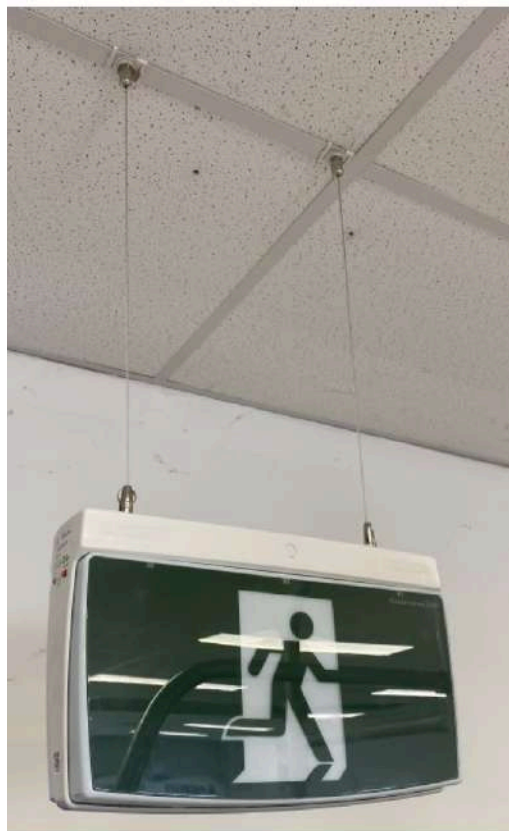

TOP HAT



HOW TO ORDER

Kits come in packs of two
Drop Length = 2m or 4m
Outside of this is custom

PART CODES

AL1-SF-M4-BB6-2M-FNA6X30-2PK
AL1-SF-M4-BB6-4M-FNA6X30-2PK

CEILING GRID




TBAR-CLIP-M6-W-2PK

FEATURES / BENEFITS


- Simple one handed operation for easy adjustment
- Contemporary design to compliment the overall suspension
- Extensive range of ceiling fixtures allowing installation in most locations
- Variety of feet fixings to enable attachment to different fixing points
- Supplied in convenient, ready-to-use kits in lengths up to 10 m as standard
- Uses 1.5 mm wire rope to make the suspension as discreet as possible



INSTALLATION & ADJUSTMENT



SPECIFICATIONS



Side Exit Male


- Threaded male foot, ideal for direct attachment to light fittings frames and acoustic panels
- Side wire exit. Available in M4.
- 15 mm exposed thread length as standard (M4), bespoke lengths available on request



Dimension	A	B	C	D
Size (mm)	16	35	Ø 11.5	15


E
M4

AVAILABLE END FIXINGS




For more options on available end fixings please contact us or visit www.gripple.com

SPECIFICATIONS



Top Hat

Dimensions	A	B
Size (mm)	13.5	21



SUBMITTAL INFORMATION

Load Rating:

15 kg @ 5:1 safety factor

Material:

Housing - No. 2 Zinc Alloy (EN 12844 ZP2)

Roller - Brass (BSEN 12164)

Spring - Acetal (POM)

Plating - Bright Nickel Plating (BS 4758)

