


HIGH BAY HANGER KITS




Option 1

Length of wire rope with pre-swaged loop end fixing

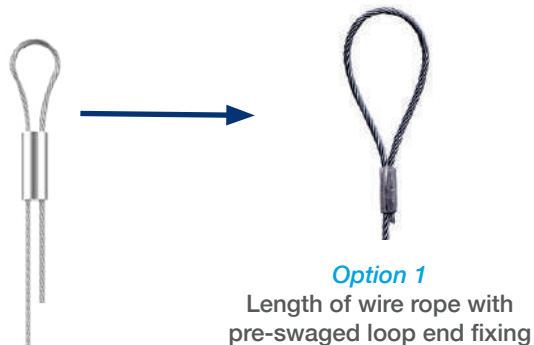

Option 2

Purlin Bracket with 14G Tek Screw

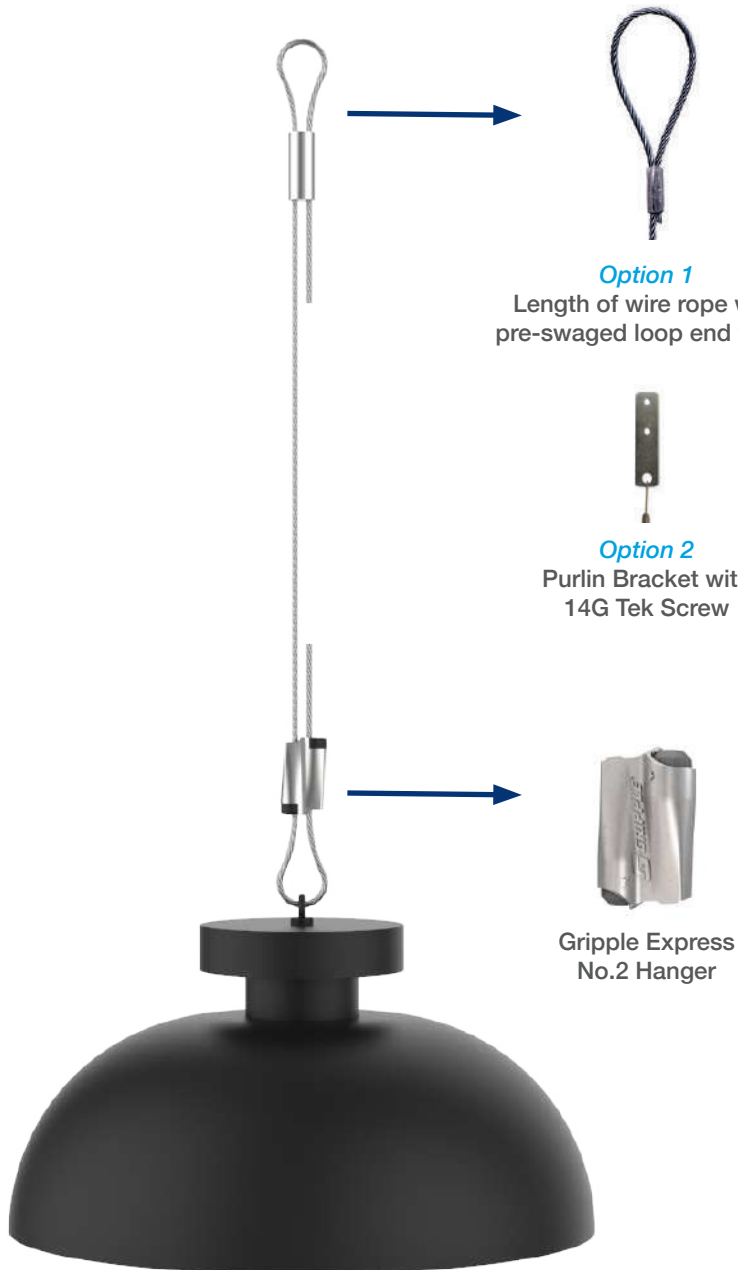

Gripplle Express No.2 Hanger

XP2 - No.2 Express Hanger

- The XP2 is ideal for high bay lights
- Up to six times faster to install than traditional methods
- Keyless; no tool required for adjustment
- Ergonomic buttons allow rapid adjustment
- Discreet and aesthetic design
- Supplied as a ready-to-use kit

PRODUCT SPECIFICATION

Safe Working Load: Up to 45 kg @ 5:1 safety factor

Material:

Housing - Type ZA2 Zinc

Wedge - Sintered steel hardened to min. 56 Rockwell C

Spring - Stainless Steel (Type 302)

End Cap - UV stabilised homopolymer polypropylene

gripplleaustralia.com.au

Polyplas International Pty Ltd, 3 Corporate Avenue, Rowville, VIC 3178
Tel: 03 9754 0333 Fax: 03 9755 6071 Email: info@gripplle.net.au


Express Range

Tool free locking device for fast suspension of a variety of services, designed with a keyless release mechanism.

- The XP1 is ideal for signage, shopfitting, lighting and other lightweight fixtures
- The XP2 is ideal for mechanical and electrical applications
- Up to six times faster to install than traditional methods
- Keyless; no tool required for adjustment
- Ergonomic buttons allow rapid adjustment
- Discreet and aesthetic design
- Supplied as a ready-to-use kit




Installation & Adjustment

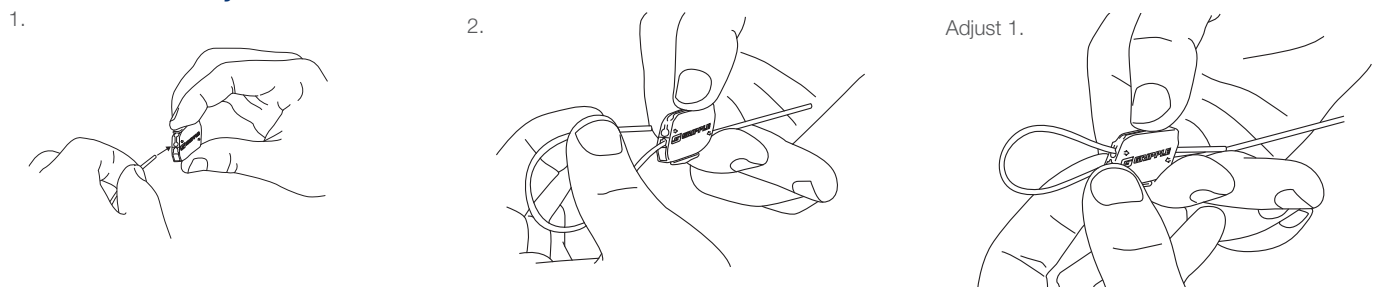

Ensure a minimum 75 mm of tail wire exit the hanger.

Specifications

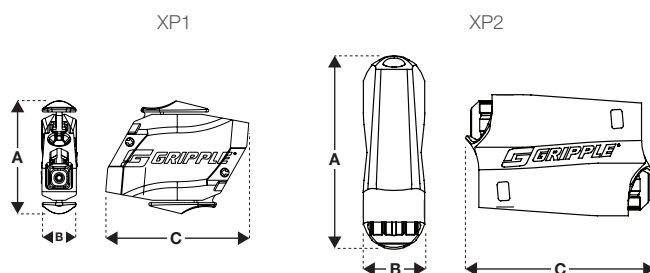

Hanger #	Dimensions			Safe Working Load All with a 5:1 safety factor
	A	B	C	
No. 1	18.5	5.9	23.5	0- 15 kg
No. 2	21.4	11.6	28.4	0 - 45 kg

Submittal Information

Housing - Type ZA2 Zinc

Wedge - Sintered steel hardened to min. 56 Rockwell C

Spring - Stainless Steel (Type 302)

End Cap - Polypropylene (MOPLen EP448T)

No. 1 Button - Acetal

No. 2 Button - 30% Glass filled Polypropylene

Available End Fixings



For more options on available end fixings please contact us or visit gripple.net.au